RIO 2015 ATS ACTIVE TOE SYSTEM SET-UP SHEET
1/10 190mm Electric Touring Car

ARC

RACE	AARC
TRACK	AARC
NAME	CESAR SALVADORI
CITY / COUNTRY	ST. ANDRÉ - SP
DATE	31/08/2015

TEMPERATURE	AIR 3	TRACK

QUALIFYING POSITION	BEST LAPTIME	FINAL POSITION	RACE LENGTH
4	16,5 SEC	1	5 MIN

TRACK CONDITION: ☐ TECHNICAL ☐ CARPET ☑ MIXED ☑ ASPHALT ☑ FAST

TRACTION: ☐ LOW ☐ MEDIUM ☑ HIGH

TRANSMISSION

FRONT	REAR
GEAR DIFF	GEAR DIFF
☑ RIDE PUTTY 45 CST	☑ 5000 CST
☐ ONE WAY	Number of Gears
☐ SPOOL	☐ 2 ☑ 4

MOTOR	LRP 10.5 STOCK	ESC	LRP FLOW
PINION DP	39 T	SPUR GEAR DP	96 T
FINAL DRIVE RATIO (Internal Ratio: 2.0)	4.92		

FRONT			REAR	
OIL	☐ 3 HOLE ☑ 4 HOLE	SHOCK PISTON	☐ 3 HOLE ☑ 4 HOLE	OIL
450 CST		HOLE SIZE		450 CST
SPRING		☑ 1.1 mm		SPRING
BLUE		☐ mm		BLUE

SOLARIS 35	TIRES	SOLARIS 35
	RIM	
	INSERTS	
PROTEK RED	ADDITIVE	PROTEK RED

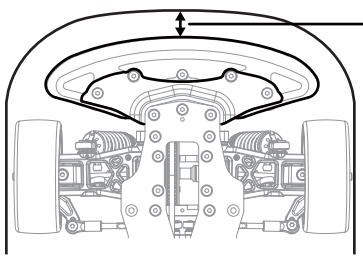

Bumper: ☑ Standard ☐ Cut

BODY MOUNT DISTANCE: mm

BODY	BLITZ GSF	WING	BLITZ 65035

ATS SETUP

ATS Upright Shims	ATS Base Shims
0 mm	2 mm

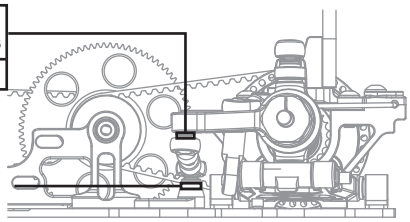

NOTE *Alteration by Arn0 at PetitRC.com*

HARD SUSPENSION PARTS
2mm BUMP STEERING
30 GRAMS BALLAST BELOW STEERING SYSTEM

LRP FLOW V5.4 FIRMWARE 0-1-0-10-0-0-1
LRP 5800 STOCKSPEC BATTERY

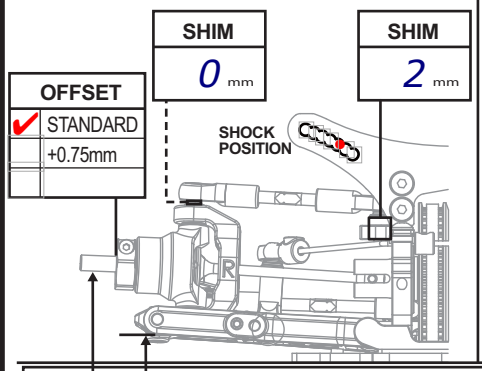

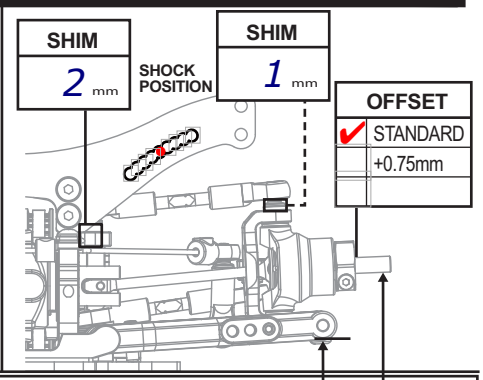

mm | 5.5 mm | FRONT | DOWNSTOP | REAR | 5.5 mm | mm

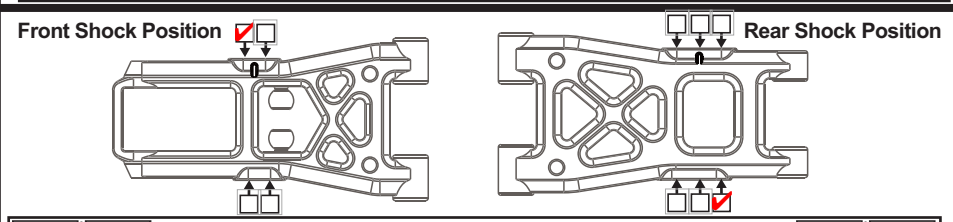

° | 1 ° | CAMBER | 1 ° | °

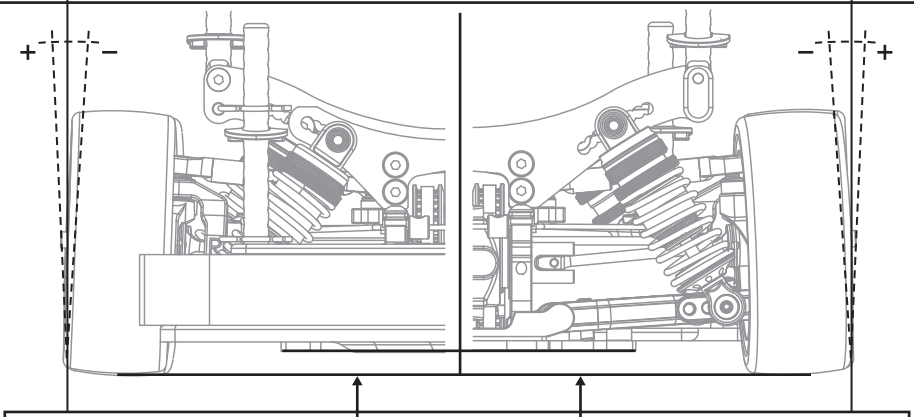

FRONT RIDE HEIGHT 4.8 mm | 5.2 mm REAR RIDE HEIGHT

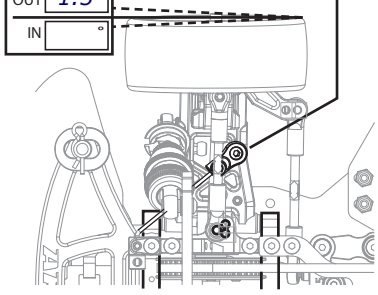

FF BRACKET # 2 | FR BRACKET # 1

☐ Kit Steering ☑ Float Steering

SHIM 2 mm



BELL CRANK
☑ STANDARD
☐ 20mm Alu
☐ 22mm Alu

ANTIROLL BAR R 1.3 mm

Rear Upright

ATS	2 Hole	1 Hole
☑		

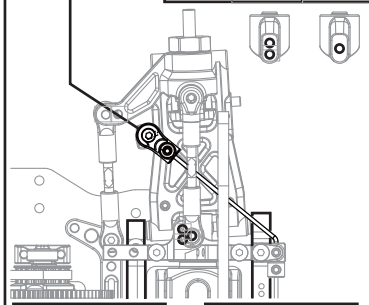

RF BRACKET # 0 | RR BRACKET # 3

TOPDECK 2.0 mm ver 2015

CHASSIS 2.0 mm ver 2015

BATTERY FASTEN DIRECTION
☑ SIDE ☐ STANDARD

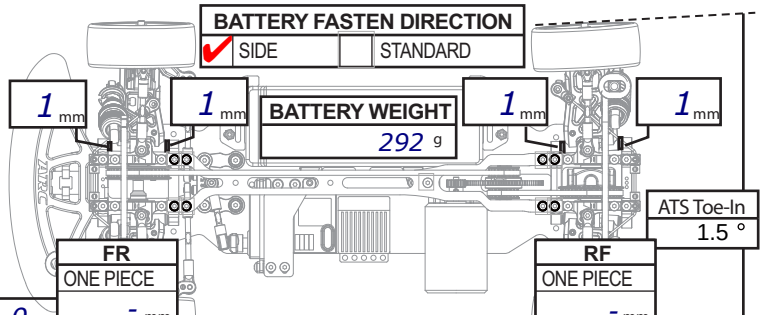

ATS Toe-In 1.5 °

DIFF HEIGHT

Fr		Rr
	HIGH	
☑	LOW	

FF 0 mm

FR	RF
ONE PIECE - mm	ONE PIECE - mm
SEPARATED 0 mm	SEPARATED 1 mm

ROLL CENTER SHIMS

RR 1 mm